#### **POWER CUTTER**

### 695XL Deepest, Most Versatile Gas Power Cutter

The 695XL features include an easy to start engine with higher energy ignition system and durable, long-lasting components including a new muffler, carburetor and piston & cylinder. Available with 12-inch (30 cm), 16-inch (40cm) and 20-inch (50cm) guidebars for the FORCE4° and PowerGrit° series diamond chains and 12-inch (30cm), 14-inch (35cm) and 16inch (40cm) guidebars for the FORCE3° series of diamond chains.. Based on the best-selling 695 power cutter platform, the 695XL is the highest horsepower ICS° gas power cutter for frequent-use by general construction, utility contractors and concrete professionals.

### 695XL TECHNICAL SPECIFICATIONS

Bar Cutting DepthPowerGrit/PowerGrit XL 12in/30cm, 16 in/40cm FORCE3 12in/30cm, 14 in/35cm, 16 in/40cmPowerhead Weight21 lbs/9.6 kgEngine Speed9300 +/- 150 rpm (max)Idling Speed2700 +/- 100 rpmHorsepower6.4 hp (4.8 kW) @ 9000 rpmEngine Type2-stroke, single cylinder, air cooledDisplacement5.7 cu inch (94 cc)Powerhead115 dB(A); (Kwa = 1.0 dB(A))Guaranteed Sound Power Level, Lwa (1)104.6 dB(A): (K = 1.0 dB(A))Sound Pressure Level, at Operator's Ear Lwa (1)3.6 m/s² (K=0.2 m/s²) Front Handle 5.28 m/s² (K=0.2 m/s²) Front Handle Sound Pressure Level, Minimum of 20 psi (1.4 bar)Water Supply RequirementMinimum: 2 gpm (8 lpm)Fuel Mix Ratio50:1 (2%) fuel-to-oilFuel Capacity0.26 gal (1.0 liter)		
Engine Speed9300 +/- 150 rpm (max)Idling Speed2700 +/- 100 rpmHorsepower6.4 hp (4.8 kW) @ 9000 rpmEngine Type2-stroke, single cylinder, air cooledDisplacement5.7 cu inch (94 cc)Powerhead Dimensions18"L x 14" H x 12" W (46 cm x 36 cm x 30 cm)Guaranteed Sound Power Level, Lwa (1)115 dB(A); (Kwa = 1.0 dB(A))Sound Pressure Level, at Operator's Ear Lwa (1)104.6 dB(A): (K = 1.0 dB(A))Vibration, a hv, eq Concrete Cutting (2)3.6 m/s² (K=0.2 m/s²) Front Handle 5.28 m/s² (K=0.2 m/s²) Front Handle 5.28 m/s² (K=0.2 m/s²) Rear HandleWater Supply RequirementMinimum of 20 psi (1.4 bar)Water Flow RequirementMinimum: 2 gpm (8 lpm)Fuel Mix Ratio50:1 (2%) fuel-to-oil	Bar Cutting Depth	12in/30cm, 16 in/40cm FORCE3 12in/30cm, 14 in/35cm, 16 in/40cm FORCE4
Idling Speed2700 +/- 100 rpmHorsepower6.4 hp (4.8 kW) @ 9000 rpmEngine Type2-stroke, single cylinder, air cooledDisplacement5.7 cu inch (94 cc)Powerhead18"L x 14" H x 12" W (46 cm x 36 cm x 30 cm)Guaranteed Sound Power Level, Lwa (1)115 dB(A); (Kwa = 1.0 dB(A))Sound Pressure Level, at Operator's Ear Lwa (1)104.6 dB(A): (K = 1.0 dB(A))Vibration, a hv, eq Concrete Cutting (2)3.6 m/s² (K=0.2 m/s²) Front Handle 5.62 m/s² (K=0.2 m/s²) Rear HandleVibration, a hv, eq Pipe Cutting (2)5.62 m/s² (K=0.2 m/s²) Front Handle 5.28 m/s² (K=0.2 m/s²) Rear HandleWater Supply RequirementMinimum of 20 psi (1.4 bar)Water Flow 	Powerhead Weight	21 lbs/9.6 kg
Horsepower6.4 hp (4.8 kW) @ 9000 rpmEngine Type2-stroke, single cylinder, air cooledDisplacement5.7 cu inch (94 cc)Powerhead18"L x 14" H x 12" W (46 cm x 36 cm x 30 cm)Guaranteed Sound Power Level, Lwa (1)115 dB(A); (Kwa = 1.0 dB(A))Sound Pressure Level, at Operator's Ear Lwa (1)104.6 dB(A): (K = 1.0 dB(A))Vibration, a hv, eq Concrete Cutting (2)3.6 m/s² (K=0.2 m/s²) Front Handle 5.62 m/s² (K=0.2 m/s²) Front Handle 5.28 m/s² (K=0.2 m/s²) Rear HandleWater Supply RequirementMinimum of 20 psi (1.4 bar)Water Flow RequirementMinimum: 2 gpm (8 lpm)Fuel Mix Ratio50:1 (2%) fuel-to-oil	Engine Speed	9300 +/- 150 rpm (max)
Engine Type2-stroke, single cylinder, air cooledDisplacement5.7 cu inch (94 cc)Powerhead18"L x 14" H x 12" W (46 cm x 36 cm x 30 cm)Guaranteed Sound Power Level, Lwa (1)115 dB(A); (Kwa = 1.0 dB(A))Sound Pressure Level, at Operator's Ear Lwa (1)104.6 dB(A): (K = 1.0 dB(A))Vibration, a hv, eq Concrete Cutting (2)3.6 m/s² (K=0.2 m/s²) Front Handle 5.62 m/s² (K=0.2 m/s²) Rear HandleVibration, a hv, eq Pipe Cutting (2)5.62 m/s² (K=0.2 m/s²) Front Handle 5.28 m/s² (K=0.2 m/s²) Rear HandleWater Supply RequirementMinimum of 20 psi (1.4 bar)Water Flow RequirementMinimum: 2 gpm (8 lpm)Fuel Mix Ratio50:1 (2%) fuel-to-oil	Idling Speed	2700 +/- 100 rpm
Displacement5.7 cu inch (94 cc)Powerhead Dimensions18"L x 14" H x 12" W (46 cm x 36 cm x 30 cm)Guaranteed Sound Power Level, Lwa (1)115 dB(A); (Kwa = 1.0 dB(A))Sound Pressure Level, at Operator's Ear Lwa (1)104.6 dB(A): (K = 1.0 dB(A))Vibration, a hv, eq Concrete Cutting (2)3.6 m/s² (K=0.2 m/s²) Front Handle 5.62 m/s² (K=0.2 m/s²) Front Handle 5.28 m/s² (K=0.2 m/s²) Rear HandleVibration, a hv, eq Pipe Cutting (2)5.62 m/s² (K=0.2 m/s²) Front Handle 5.28 m/s² (K=0.2 m/s²) Rear HandleWater Supply RequirementMinimum of 20 psi (1.4 bar)Water Flow RequirementMinimum: 2 gpm (8 lpm)Fuel Mix Ratio50:1 (2%) fuel-to-oil	Horsepower	6.4 hp (4.8 kW) @ 9000 rpm
Powerhead Dimensions18"L x 14" H x 12" W (46 cm x 36 cm x 30 cm)Guaranteed Sound Power Level, Lwa (1)115 dB(A); (Kwa = 1.0 dB(A))Sound Pressure Level, at Operator's Ear Lwa (1)104.6 dB(A): (K = 1.0 dB(A))Vibration, a hv, eq Concrete Cutting (2)3.6 m/s² (K=0.2 m/s²) Front Handle 3.1 m/s² (K=0.2 m/s²) Front Handle 5.62 m/s² (K=0.2 m/s²) Rear HandleVibration, a hv, eq Pipe Cutting (2)5.62 m/s² (K=0.2 m/s²) Front Handle 5.28 m/s² (K=0.2 m/s²) Rear HandleWater Supply RequirementMinimum of 20 psi (1.4 bar)Water Flow RequirementMinimum: 2 gpm (8 lpm)Fuel Mix Ratio50:1 (2%) fuel-to-oil	Engine Type	2-stroke, single cylinder, air cooled
Dimensions(46 cm x 36 cm x 30 cm)Guaranteed Sound Power Level, Lwa (1)115 dB(A); (Kwa = 1.0 dB(A))Sound Pressure Level, at Operator's Ear Lwa (1)104.6 dB(A): (K = 1.0 dB(A))Vibration, a hv, eq Concrete Cutting (2)3.6 m/s² (K=0.2 m/s²) Front Handle 3.1 m/s² (K=0.2 m/s²) Rear HandleVibration, a hv, eq Pipe Cutting (2)5.62 m/s² (K=0.2 m/s²) Front Handle 5.28 m/s² (K=0.2 m/s²) Rear HandleWater Supply RequirementMinimum of 20 psi (1.4 bar)Water Flow RequirementMinimum: 2 gpm (8 lpm)Fuel Mix Ratio50:1 (2%) fuel-to-oil	Displacement	5.7 cu inch (94 cc)
Power Level, Lwa (1)T15 dB(A); (Kwa = 1.0 dB(A))Sound Pressure Level, at Operator's Ear Lwa (1)104.6 dB(A): (K = 1.0 dB(A))Vibration, a hv, eq Concrete Cutting (2)3.6 m/s² (K=0.2 m/s²) Front Handle 3.1 m/s² (K=0.2 m/s²) Rear HandleVibration, a hv, eq Pipe Cutting (2)5.62 m/s² (K=0.2 m/s²) Front Handle 5.28 m/s² (K=0.2 m/s²) Rear HandleWater Supply RequirementMinimum of 20 psi (1.4 bar)Water Flow RequirementMinimum: 2 gpm (8 lpm)Fuel Mix Ratio50:1 (2%) fuel-to-oil		
at Operator's Ear Lwa (1)104.6 dB(A): (K = 1.0 dB(A))Vibration, a hv, eq Concrete Cutting (2)3.6 m/s² (K=0.2 m/s²) Front Handle 3.1 m/s² (K=0.2 m/s²) Rear HandleVibration, a hv, eq Pipe Cutting (2)5.62 m/s² (K=0.2 m/s²) Front Handle 5.28 m/s² (K=0.2 m/s²) Rear HandleWater Supply RequirementMinimum of 20 psi (1.4 bar)Water Flow RequirementMinimum: 2 gpm (8 lpm)Fuel Mix Ratio50:1 (2%) fuel-to-oil		115 dB(A); (Kwa = 1.0 dB(A))
Concrete Cutting (2)31 m/s² (K=0.2 m/s²) Rear HandleVibration, a hv, eq Pipe Cutting (2)5.62 m/s² (K=0.2 m/s²) Front Handle 5.28 m/s² (K=0.2 m/s²) Rear HandleWater Supply RequirementMinimum of 20 psi (1.4 bar)Water Flow RequirementMinimum: 2 gpm (8 lpm)Fuel Mix Ratio50:1 (2%) fuel-to-oil	at	104.6 dB(A): (K = 1.0 dB(A))
Pipe Cutting (2)5.28 m/s² (K=0.2 m/s²) Rear HandleWater Supply RequirementMinimum of 20 psi (1.4 bar)Water Flow RequirementMinimum: 2 gpm (8 lpm)Fuel Mix Ratio50:1 (2%) fuel-to-oil		
RequirementMinimum of 20 psi (1.4 bar)Water Flow RequirementMinimum: 2 gpm (8 lpm)Fuel Mix Ratio50:1 (2%) fuel-to-oil		
RequirementMinimum: 2 gpm (8 lpm)Fuel Mix Ratio50:1 (2%) fuel-to-oil		Minimum of 20 psi (1.4 bar)
		Minimum: 2 gpm (8 lpm)
Fuel Capacity0.26 gal (1.0 liter)	Fuel Mix Ratio	50:1 (2%) fuel-to-oil
	Fuel Capacity	0.26 gal (1.0 liter)










(1) Measured in accordance with ANSI S12.51-2012/ISO3741:2010 (2) Measured in accordance with ISO5349-1:2001, ISO22867:2011 and ISO19432:2012



#### **Diamond Tools and Equipment**

## ICSDIAMONDTOOLS.COM | 800.321.1240


Effective January 1, 2024 | Copyright 2024 ICS, Oregon Tool Inc. Pricing, product offerings and specifications are subject to change without notice. All rights reserved. WallWalker, SpeedHook, SealPRO, FORCE4, FORCE3 and PowerGrit are registered trademarks of ICS. The best way to cut concrete, DCT, TSS, and ProFORCE are trademarks of ICS. Rev: 010124

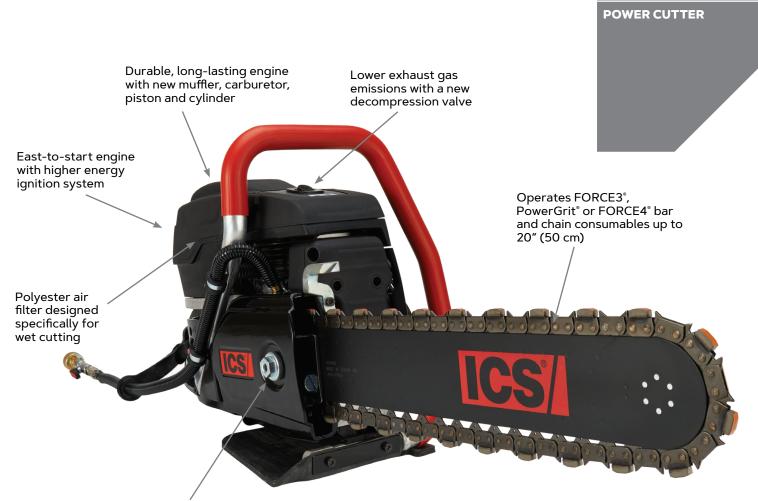

Extended drive sprocket adapter offers easier chain assembly



Deep cutting solution for obstructed or small openings



Easy tensioning of chain



Safer to cut ductile iron



**PRODUCT DATASHEET** 

Versatile



### **Diamond Tools and Equipment**

# ICSDIAMONDTOOLS.COM | 800.321.1240

Effective January 1, 2024 | Copyright 2024 ICS, Oregon Tool Inc. Pricing, product offerings and specifications are subject to change without notice. All rights reserved. WallWalker, SpeedHook, SealPRO, FORCE4, FORCE3 and PowerGrit are registered trademarks of ICS. The best way to cut concrete, DCT, TSS, and ProFORCE are trademarks of ICS. Rev: 010124